



RoHS Compliant Glass Discharge Tube SCC-141N SPG Spark Gap Protectors

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: REACH, RoHS, ISO
- Model Number: SCC-141N
- Minimum Order Quantity: 1500PCS
- Price: Negotiable
- Packaging Details: AMMO packing bulk
- Delivery Time: 5-8 work days



Product Specification

- Product Name: Spark Gap Protectors (SPG)
- Package Type: Axial Lead
- VS: 140(98~182)V
- IR/DC: 100M/50V
- C: 1.0pF
- 8/20μS: 3000A
- Surge Life Test: 10KV / 150A , >300T
- Highlight: RoHS Glass Discharge Tube,
SPG Glass Discharge Tube,
SPG Spark Gap Protectors



More Images



for more products please visit us on socaydiode.com

Product Description

Original Factory Supply Spark Gap Protectors (SPG) SCC-141N SPG SOCAP Provide Free Protection Plan

DATASHEET: [SCC_v2204.1 .pdf](#)

Part Number	DC Spark-over Voltage Vs(V)	Minimum Insulation Resistance IR(OHM)/DC	Maximum Capacitance 1KHZ-6Vmax C (pF)	Surge Current Capacity 8/20 μS	Surge Life Test
SCC-141N	140(126~210)	100M / 50V	1.0	3000A	10KV / 150A , >300T
SCC-201M	200(160~240)	100M /100V	1.0	3000A	10KV / 150A , >300T
SCC-251M	250(200~300)	100M /100V	1.0	3000A	10KV / 150A , >300T
SCC-301M	300(240~360)	100M /100V	1.0	3000A	10KV / 150A , >300T
SCC-401M	400(320~480)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-501M	500(400~600)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-601M	600(480~720)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-701M	700(560~840)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-801M	800(640~960)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-102M	1000(800~1200)	100M / 500V	1.0	3000A	10KV / 150A , >300T
SCC-122M	1200(960~1440)	100M / 500V	1.0	3000A	10KV / 150A , >300T
SCC-302M	3000 (2400~3600)	100M / 500V	1.0	3000A	10KV / 150A , >300T
SCC-362M	3600 (2880~4320)	100M / 500V	1.0	3000A	10KV / 150A , >300T



Features:


- u Approximately zero leaking current before clamping voltage
- u Less decay at on/off state.
- u High capability to withstand repeated lightning strikes.
- u Low electrode capacitance ($\leq 1.0\text{pF}$) and high isolation ($\geq 100\text{M}\Omega$).
- u RoHS compliant.
- u Bilateral symmetrical.
- u Temperature, humidity and lightness insensitive.
- u Working temperature: $-45 \sim +125$
- u Storage temperature: $-45 \sim +125$
- u Meets MSL level 1, per J-STD-020

Applications:

- u Power Supplies
- u Motor sparks eliminating
- u Relay switching spark absorbing
- u Data line pulse guarding
- u Electronic devices requiring UL497A and UL497B compliant
- u Telephone/Fax/Modem
- u High frequency signal transmitters/receivers
- u Satellite antenna
- u Radio amplifiers
- u Alarm systems
- u Cathode ray tubes in Monitors/TVs


Part Number	Color Code1	Color Code2	Color Code3
SCC-141N	Brown	Red	White
SCC-201M	Red	Brown	White
SCC-251M	Red	Green	Brown
SCC-301M	Orange	Red	White
SCC-401M	Yellow	Brown	White
SCC-501M	Green	Orange	Red
SCC-601M	Blue	Red	Orange
SCC-801M	Gray	Black	Red
SCC-102M	Black	Black	Red
SCC-122M	Black	Red	Orange
SCC-302M	Orange	Black	Red
SCC-362M	Orange	Blue	Red

Recommended Soldering Conditions

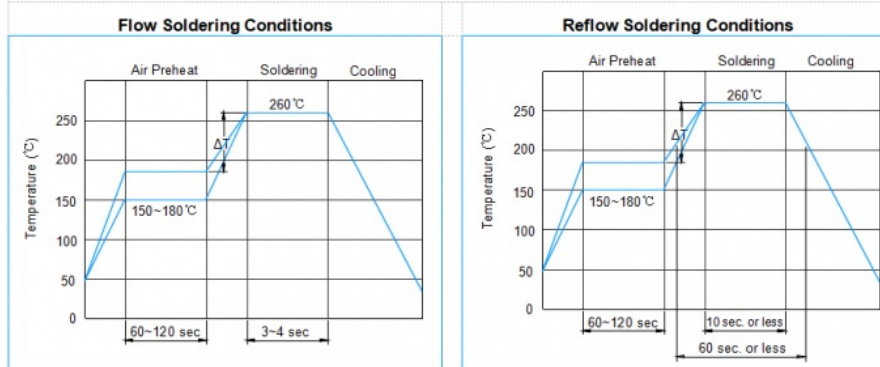


- 1) Time shown in the above figures is measured from the point when chip surface reaches temperature.
- 2) Temperature difference in high temperature part should be within 110°C .
- 3) After soldering, do not force cool, allow the parts to cool gradually.

Dimensions

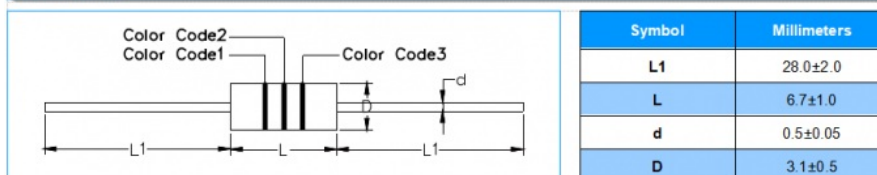


Packaging

Tape

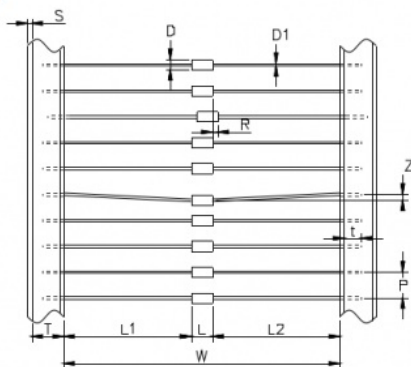

Symbol	Dimension (mm)
W	52+2.0/-1.0
P	5.0±0.5
T	6.0±1.0
Z	1.2 Max
L1-L2	1.0 Max
S	0.8 Max
t	3.2 Max
L	6.7±1.0
D1	Φ0.5±0.05
D	Φ3.1±0.5
R	1.0 Max

Inner Box



Item	Description
Length	A=255 mm
Width	B=75 mm
Height	C=68 mm
Quantity	1500 PCS
Package	There are upper and bottom board to protect the parts from damage.

 **Socay® Shenzhen Socay Electronics Co., Ltd.**

 +8618126201429

 sylvia@socay.com

 socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China